

## Fiber Separation Tool FST-12

The FST-12 is a tool to split a 12-fiber ribbon into individual fibers with separation ratio from 1:11 to 6:6. This handy tool is designed for operation in limited space in splice closure.

Sub-groups of fibers can be extracted by performing two overlapping separation of the ribbon.




Upper-jaw is open

STANDARD PACKAGE		
Description	Model	Q'ty
Fiber separation tool	FST-12	1pc.
Instruction manual	-	1pc.

APPLICABLE FIBER	
Applicable fiber	Silica fiber
Coating material	UV cured resin
Applicable fiber count	12 fibers (fiber pitch 250 $\mu$ m)
Thickness of fiber ribbon	250 $\mu$ m to 360 $\mu$ m

SPECIFICATIONS	
Splitting ratio	1:11, 2:10, 3:9, 4:8, 5:7, 6:6
Dimension	160W x 126W x 30H (mm)
Weight	0.27kg
Operating condition	0 to 95%RH and -10 to 50C respectively
Storage condition	-40 to 80C

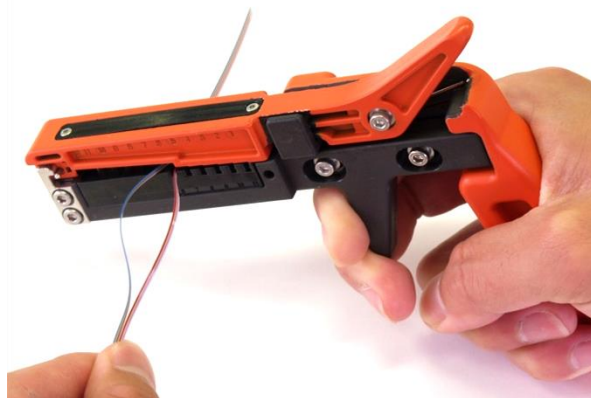

12-ribbon fiber in the tool is separated into two portions.

Specifications and descriptions are subject to change without prior notice. © 2012 Fujikura Ltd.

**Fujikura Ltd.**

1-5-1, Kiba, Koto-ku, Tokyo 135-8512, Japan

Phone : +81-3-5606-1164 Fax : +81-3-5606-1534 <http://www.fujikura.co.jp>

**Fujikura Asia Ltd.**

438A Alexandra Road, Block A Alexandra Technopark #08-03 Singapore 119967

Phone : +65-6-278-8955 Fax : +65-6-278-0965 <http://www.fujikura.com.sg>

**Fujikura Europe Ltd.**

C51 Barwell Business Park, Leatherhead Road, Chessington, Surrey KT9 2NY, UK

Phone : +44-20-8240-2000 Fax : +44-20-8240-2010 <http://www.fujikura.co.uk>

**AFL**

260, Parkway East, Duncan, SC29334, USA

Phone : +1-800-235-3423 Fax : +1-800-926-0007 <http://www.aflglobal.com>

**Fujikura (China) Co., Ltd.**

7<sup>th</sup> Floor, Shanghai Hang Seng Bank Tower, 1000 Lujiazui Ring Road, Pudong New Area, Shanghai 200120, CHINA

Phone : +86-21-6841-3636 Fax : +86-21-6841-2070 <http://www.fujikura.com.cn>